


## Technical Features

- Voltage Supply 12V DC Li-ion Battery
- Index Protection Rating IP 20 (indoor use only)
- Electronic Limit (RTB)
- Built-in Receiver
- Switch Direction
- Jog & Tilt
- Third Party Automation

## Dimensions

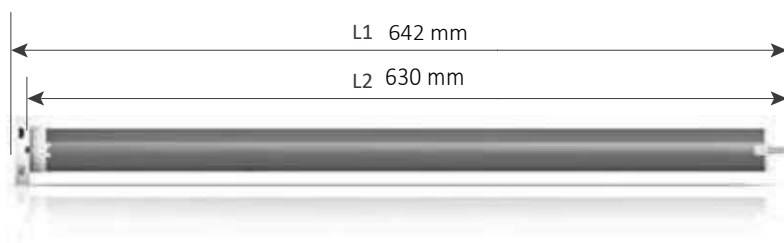

Power Connector (Requires BAST approved power supply)

## Specifications

Voltage	12V DC
Motor power connection	Micro USB 5V
Nominal load starting current	1.5A
Rated current	1.25A
Temperature	-10--+50
Torque	2.0 Nm
Speed	Adjustable: 3 Gears 28 rpm (default: 28)
Rated Power	15 W
Emission Frequency	433.925 MHZ
Sound Level*	38 dBA
RF control range (may vary)	65 ft.

### \*Sound level:

Sound level measured at 3 feet from end product at maximum torque.

### Fabrication recommendations:

- Operational noise level is reduced when motor, tube, and mechanical accessories are properly adapted to motorized applications.
- Free play must be minimized between the accessories and the end product tube to ensure quiet performance of the motor.
- Interior Tube Diameter (ID) > 31 mm must be respected.
- A motor crown adaptor between motor and end product tube is required to ensure concentric operation of motor

