


Technical Features

- Voltage Supply 24V DC
- Index Protection Rating IP 30 (indoor use only)
- Limit Switch Electronic (RTB)
- Built-in Receiver
- Switch Direction
- Antenna Must not come in contact with metal

Dimensions

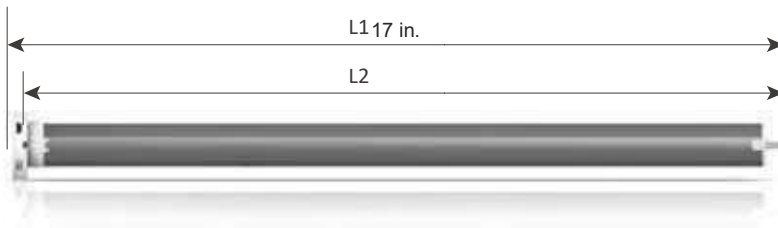

Power Connector (Requires BAST approved power supply)

Specifications

Voltage	24V DC
Motor power connection	2 pin JST, 2 mm pitch
Nominal load starting current	1.8A for max. 300 ms
Nominal load current	0.16A
Temperature	-10--+85
Torque	2 Nm
Speed	Adjustable: 3 Gears 28 rpm (default: 28)
Rated Power	18W
Emission Frequency	433.92 MHz
Sound Level*	38 dBA
RF control range (may vary)	65 ft.

***Sound level:**

Sound level measured at 3 feet from end product at maximum torque.

Fabrication recommendations:

- Operational noise level is reduced when motor, tube, and mechanical accessories are properly adapted to motorized applications.
- Free play must be minimized between the accessories and the end product tube to ensure quiet performance of the motor.
- Interior Tube Diameter (ID) > 31 mm must be respected.
- A motor crown adaptor between motor and end product tube is required to ensure concentric operation of motor.

Type of power cable

24V DC POWER CABLE

2-Conductor
7.5' Length
24 AWG Conductors



Maximum Power Cable Length (to guarantee characteristics)

GAUGE	LENGTH
14 AWG	240 ft.
16 AWG	150 ft.
18 AWG	100 ft.

